



AUDIO INTERCOM 1-WAY



✔ Suitable for professional use
(7 time slots per button)

✔ Vandal resistant


AUDIO INTERCOM 1-WAY 1 to 3 buttons, flush-fit
Proximity reader as an optional extra



REMOTE ONLINE
MANAGEMENT
www.intratone.com

MAX. NUMBER OF HOMES MANAGED	3
SYSTEM	
Audio	•
CONNECTION	
3G unit	•
ACCESS CONTROL EQUIPMENT	
Proximity reader	As an optional extra
FITTING	
Flush-fit	•
FINISH	
Stainless steel	•
Brass	•

SIMPLIFIED DIAGRAM

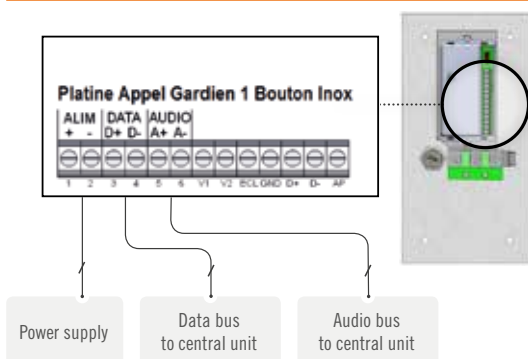

Speech synthesis

Operational messages (call in progress, etc.)
Sound level adjustment: via the central unit (03-0101-XX)
Call transfer
Time slot programming: up to 7 per day and per button

TECHNICAL SPECIFICATIONS

POWER SUPPLY	CABLING	INTERCOM SIZE	ENVIRONMENT
Central unit 12/24 V DC 2A	Central unit - Intercom 6 wires (3 twisted pairs) - Ø 0.8 mm Max. distance: 200 m Central unit - 3G unit 6 wires (3 twisted pairs) - Ø 0.8 mm Max. distance: 100 m	Central unit - PSTN line 2 wires- Ø 8 mm Max. distance: 200 m	Intercom operating temperature -10°C to + 60°C Intercom storage temperature -20°C to + 70°C Intercom protection class Intercom IP55 Outdoor fitting
		Facade - Intercom 130 x 250 x 3 mm Built-in wall box 101 x 220 x 37 mm Central unit 03-0101 with closed box 160 x 235 x 70 mm	

AUDIO INTERCOM 1-WAY RANGE

REFERENCES		OUR PRICES
14-0101-XX	1 call button	
14-0102-XX	1 call button + 1 proximity reader	
14-0103-XX	2 call buttons	
14-0104-XX	3 call buttons	