



CENTRAL UNIT 1 DOOR

- Cost-effective
- Only on mobile networks



03-0102-XX: Central unit for 1 door and/or 100 names




REMOTE ONLINE
MANAGEMENT
www.intratone.com



TIP
Control up to 3 additional relays with the relay card. 12-0110-XX (page 74)

SIMPLIFIED DIAGRAM

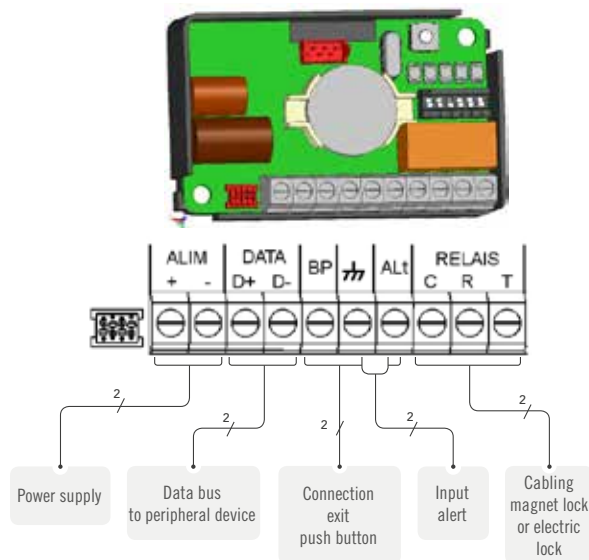

MAX. NUMBER OF ACCESS POINTS MANAGED	
1 door	1 door
Optional extension card	no
Max. number of intercoms per central unit	1
Number of relays	1
Number of additional relays (12-0110-XX)	3
CONNECTION	
3G unit / 3G-IP Intratone (mobile networks)	•
Networking	no
MANAGEMENT	
In Real-time and remotely (www.intratone.com)	•
Max. number of names displayed	100
Max. number of badges/remote controls/mobile keys	1,000
Max. number of keypad codes	40
Max. number of telephone codes	10
FUNCTIONS	
Open access time slots	•
Annual clock	•
Log events	•
Auto-diagnostics	•
Alarm(s)	1 (+3 with 3 12-0110-XX)

TECHNICAL SPECIFICATIONS

POWER SUPPLY

Central unit
12/24 V DC
1 to 2 A

CABLING

Central unit - Intercom
4 wires (2 twisted pairs)
Ø 8 mm
Max. distance: 200 m

Central unit - 3G unit
4 wires (2 twisted pairs)
Ø 8 mm
Max. distance: 100 m

Central unit - Reader or RF receiver or coded keypad
4 wires (2 twisted pairs)
Ø 8 mm
Max. distance: 200 m

SIZE (L X H X D)

74 mm x 59 mm x 18 mm

ENVIRONMENT

Central unit operating temperature
- 20°C to + 50°C
Central unit storage temperature
-20°C to +70°C
protection class
IP40