



CENTRAL UNIT

2 doors

✔ Controls 1 to 4 doors, up to 1,000 homes

✔ Up to 30 central units connected via 1 bus



03-0101-XX: Central unit for 4 doors and/or 1,000 names




REMOTE ONLINE
MANAGEMENT
www.intratone.com



TIP

Use the extension card to expand from 2 to 4 doors. 12-0109-XX (page 74)

SIMPLIFIED DIAGRAM

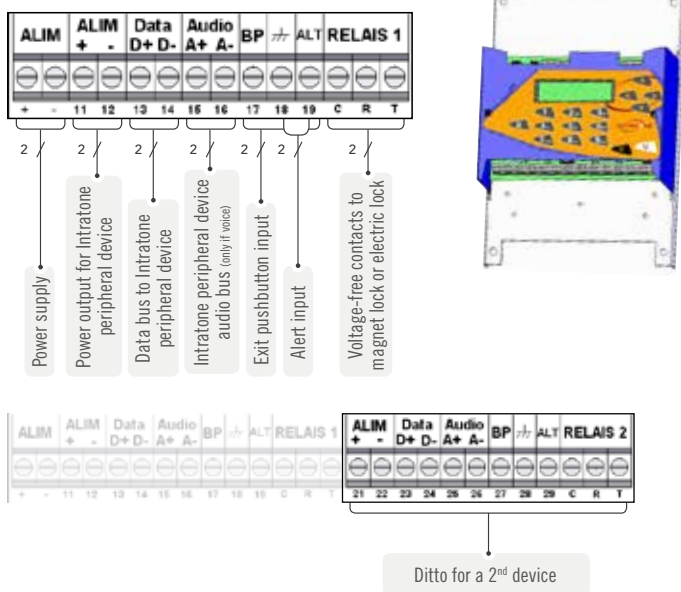

MAX. NUMBER OF ACCESS POINTS MANAGED	2 doors
--------------------------------------	---------

Optional extension card (12-0109-XX)	2 additional doors
Max. number of intercoms per central unit	3
Number of relays	2 (+2 with 3 12-0109-XX)

CONNECTION

3G unit / 3G-IP Intratone (mobile networks)	•
Networking of central units	30

MANAGEMENT

In Real-time and remotely (www.intratone.com)	•
Max. number of names displayed	1,000
Max. number of badges/remote controls/mobile keys	7,000
Max. number of keypad codes	40
Max. number of telephone codes	10

FUNCTIONS

Open access time slots	•
Annual clock	•
Log events	•
Auto-diagnostics	•
Alarms	2 (+2 with 3 12-0109-XX)

TECHNICAL SPECIFICATIONS

POWER SUPPLY

Central unit
12/24 V DC
1 to 2 A

CABLING

Central unit - Intercom
6 wires (3 twisted pairs)
Ø 8 mm
Max. distance: 200 m
Central unit - 3G unit
6 wires (3 twisted pairs)
Ø 8 mm
Max. distance: 100 m

SIZE (L X H X D)

160 x 235 x 70 mm

ENVIRONMENT

Central unit operating temperature
-20°C to + 50°C
Central unit storage temperature
-20°C to +70°C
protection class
IP40