



CENTRAL UNIT

1 door

✔ *Cost-effective*

✔ *Only on mobile networks*



03-0102-XX: Central unit for 1 door and/or 100 names




REMOTE ONLINE
MANAGEMENT
www.intratone.com



TIP

Control up to 3 additional relays with the relay card.
12-0110-XX (page 48)

SIMPLIFIED DIAGRAM

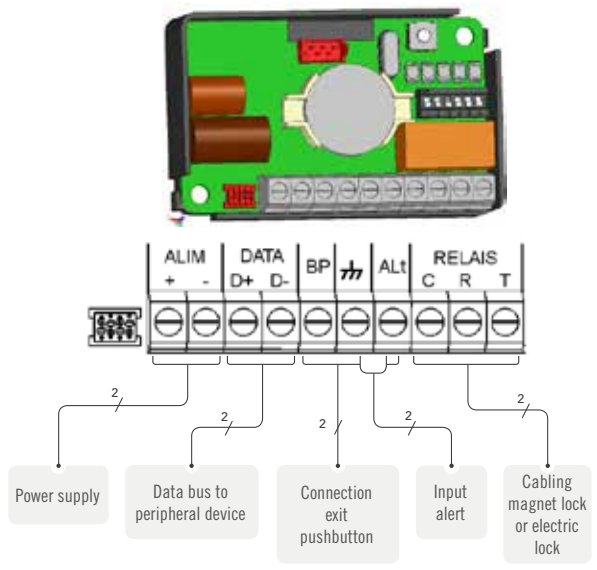

MAX. NUMBER OF ACCESS POINTS MANAGED	1 door
--------------------------------------	--------

Optional extension card	no
Max. number of intercoms per central unit	1
Number of relays	1
Number of additional relays (12-0110-XX)	3

CONNECTION

3G unit / 3G-IP Intratone (mobile networks)	•
Networking	no

MANAGEMENT

In Real-time and remotely (www.intratone.com)	•
Max. number of names displayed	100
Max. number of badges/remote controls/mobile keys	1,000
Max. number of keypad codes	40
Max. number of telephone codes	10

FUNCTIONS

Open access time slots	•
Annual clock	•
Log events	•
Auto-diagnostics	•
Alarm(s)	1 (+3 with 3 12-0110-XX)

TECHNICAL SPECIFICATIONS

POWER SUPPLY	CABLING	SIZE (L X H X D)	ENVIRONMENT
Central unit 12/24 V DC 1 to 2 A	Central unit - Intercom 4 wires (2 twisted pairs) Ø 8 mm Max. distance: 200 m Central unit - 3G unit 4 wires (2 twisted pairs) Ø 8 mm Max. distance: 100 m	Central unit - Reader or RF receiver or coded keypad 4 wires (2 twisted pairs) Ø 8 mm Max. distance: 200 m	Central unit operating temperature - 20°C to + 50°C Central unit storage temperature -20°C to +70°C protection class IP40
		74 mm x 59 mm x 18 mm	