




# Communicating KEY SAFE

- ✔ Remote, secure opening to authorised persons
- ✔ Remote call-activated opening
- ✔ Management via "Organigramme" in Real-time and remotely



Electronic tag

Communicating key safe, for integration or stand-alone



REMOTE ONLINE MANAGEMENT  
[www.intratone.com](http://www.intratone.com)



1 audio-call  
button version

## "EXCLUSIVE" VERSION

Audio alerts when open too long	•
Technical alert: break-in (strikes against the cabinet)	•
Technical alert: set of keys X removed	•
Technical alert: set of keys X returned	•
Event log on the management website (organigramme.info)	•
Management of both mechanical and electronic keys (organigramme.info)	•

**CAN HOLD UP TO 3 SETS OF KEYS**

3 available versions:

Key safe integrated into the Invisible camera video intercom

Flush-fit key safe - stainless steel finish

Key safe to be integrated into a post / door - stainless steel finish



### PRODUCT PLUS POINTS

Electronic tags are compatible with key cabinets.

You can manage everything via [www.organigramme.info](http://www.organigramme.info):

Key-dedicated equipment (cabinets, key safes and electronic tags).

User-friendly.

OPENING METHODS	Key safe only with proximity reader	Key safe combined with intercom
Authorised badges	•	•
Keypad code	•	•
Mobile key	no	no
Telephone key	no	•


## TECHNICAL SPECIFICATIONS

POWER SUPPLY	CABLING	SIZE (L X H X D)	ENVIRONMENT	
Key safe, 12/24 V DC 2 A	Key safe - GPRS unit or central unit <b>4 wires (2 twisted pairs)</b> Ø 8 mm Max. distance: 100 m	Key safe with stainless steel façade, flush-fit (02-0113-XX or 02-0114-XX) <b>150 x 220 x 48 mm</b> Bare key safe to be integrated into a post (02-0115-XX or 02-0116-XX) <b>122 x 186 x 39 mm</b>	Key safe integrated into the 3G invisible camera intercom <b>150 x 460 x 48 mm</b>	Operating temperature Key box <b>-20°C to +70°C</b> Storage temperature <b>-20°C to +70°C</b> Safe protection class <b>IP55 - Outdoor fitting</b>

## COMMUNICATING KEY SAFE RANGE

REFERENCES	FLUSH-FIT - STAINLESS STEEL FACADE	OUR PRICES
02-0117-XX	"Exclusive" version	
FOR INTEGRATION INTO A POST OR WALL - STAINLESS STEEL FACADE		
02-0116-XX	"Exclusive" version	
VISIO INTERCOMS ONLY, WITH 12-KEY BACKLIT KEYPAD, PROXIMITY READER AND INTEGRATED KEY SAFE - FLUSH-FIT		
02-0104-XX	"Exclusive" version	
COMPLETE PACKS INCLUDING 1 VISIO INTERCOM WITH INTEGRATED KEY SAFE + 1 CENTRAL UNIT - FLUSH-FIT		
02-0111-XX	1,000 names, stainless steel, with "Exclusive" version key safe (with the 2-door central unit 03-0101-XX)	
02-0112-XX	100 names, stainless steel, with "Exclusive" version key safe (with the 1-door central unit 03-0102-XX)	
<b>INTRABOX DATA ECO</b> COMPLETE PACKS FOR MANAGING 1 ACCESS POINT IN REAL-TIME AND REMOTELY, WITHOUT SUBSCRIPTION <i>Includes 1 GPRS module and 10 years of unlimited DATA updates</i>		
06-0106-XX	INTRABOX ECO DATA "EXCLUSIVE" KEY SAFE: 1 key safe, "Exclusive" version with proximity reader (02-0119-XX) + 1 GPRS module, including unlimited DATA updates for 10 years	
06-0126-XX	"Exclusive" key box, 1 audio call button - Flush-fit - Stainless steel: Intercom, 1 call button, with "Exclusive" key box (02-0117-XX) + MIFARE proximity reader + a 3G communication module and unlimited audio updates, guaranteed for 15 years. 3 tags supplied.	
MIFARE – ETIKTRONIK (FOR "EXCLUSIVE" KEY SAFES AND KEY CABINETS)		
08-0113	Box of 30 Etiktronik electronic tags - blue	
08-0114	Box of 30 Etiktronik electronic tags - red	
08-0115	Box of 30 Etiktronik electronic tags - green	
08-0116	Box of 30 Etiktronik electronic tags - 10 blue - 10 red - 10 green	
08-0117-XX	Box of 90 Etiktronik electronic tags - 30 blue - 30 red - 30 green + 1 USB programmer (12-0115-XX)	

## SIMPLIFIED DIAGRAM

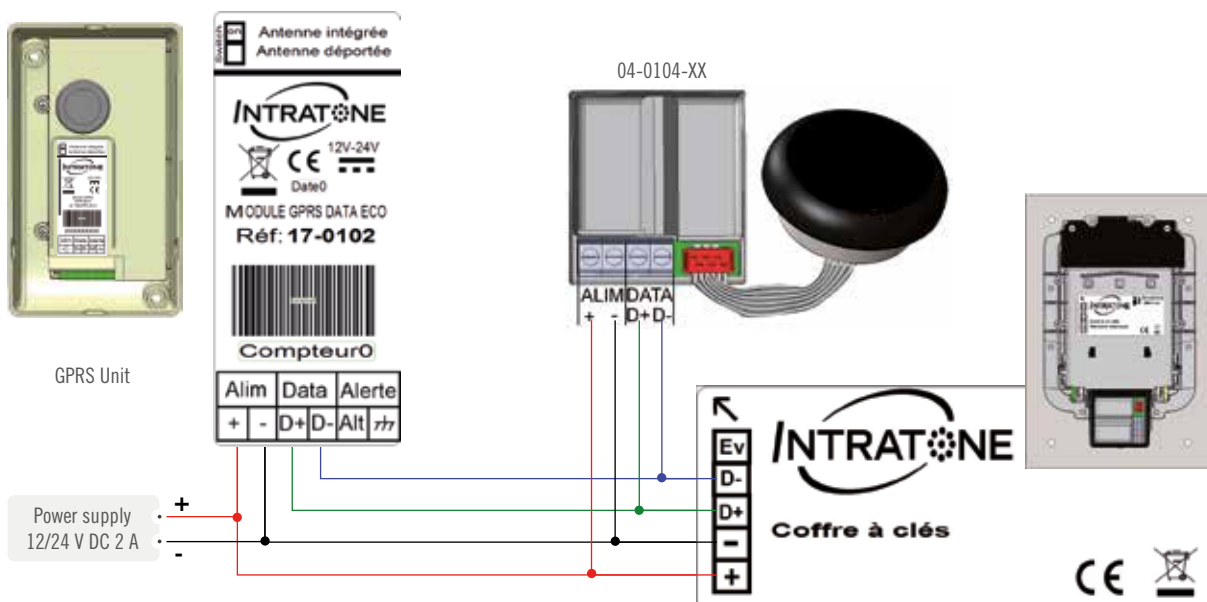

Connects in parallel to all compatible products