



INTRACODE INTERCOMS



✔ *Surface-mounted: fast, no damage*

✔ *Solid*

INTRACODE intercom with name-scrolling, 12-key backlit coded keypad and proximity reader - Surface-mounted



REMOTE ONLINE MANAGEMENT
www.intratone.com



CENTRAL UNIT	1 DOOR (03-0102-XX)	2 DOORS (03-0101-XX)
MAX. NUMBER OF HOMES MANAGED	max. 100	max. 1,000
SYSTEM		
Number of relays	1 (+3)	2 (+2)
CONNECTION		
3G unit / 3G-IP Intratone (mobile networks)	•	•
3G / 3G-IP UNIT SPECIFICATIONS		
Remote 3G / 3G-IP unit	•	•
Connection to an additional camera (remote) 3G unit	•	•
Number of video intercoms per 3G unit	1	2 (3 audio)
Connection to an additional camera (remote) 3G-IP unit	No	No
Number of video intercoms per 3G-IP unit	1	1 (3 audio)
CALLS/UPDATES INCLUDED	Request quotation	Request quotation
ACCESS CONTROL EQUIPMENT		
Coded keypad	•	•
Proximity reader	•	•
FITTING		
Surface-mounted	•	•
FINISH		
Zamak	•	•
Bronze	•	•

MORE INFO:
see pages 46 and 47
CENTRAL UNITS

Call length	40 sec.
Configurable welcome message (64 scrolling or static characters)	YES
Fast alphabetical search	YES
Simplified calling for the partially sighted	YES
Call sheet display (apartments) during time slots	YES
Operational messages: (call in progress...) Speech synthesis + display	YES
Anti-disturbance ⁽¹⁾	YES
Sound level adjustment without dismantling (depending on associated central unit)	YES
Automatic call return if no answer	YES

⁽¹⁾ System ensuring that a resident is not disturbed by repetitive calls

TECHNICAL SPECIFICATIONS

POWER SUPPLY	CABLING	INTERCOM SIZE	ENVIRONMENT	
Central unit min. 12/24 V DC - 2 A	2-DOOR CENTRAL UNIT 03-0101-XX 3G unit - Central unit 6 wires (3 twisted pairs) Ø 0.8 mm - Max: 100 m Central unit - Intercom 6 wires (3 twisted pairs) Ø 0.8 mm - Max: 200 m Intercom - 3G unit 2 wires (1 twisted pair) Ø 0.8 mm - Max: 100 m	1-DOOR CENTRAL UNIT 03-0102-XX Central unit - Intercom / 3G unit 4 wires (2 twisted pairs) Ø 0.8 mm - Max: 200 m Intercom - 3G unit 6 wires (3 twisted pairs) + 2 wires (video) Ø 0.8 mm - Max: 100 m	L x H x D 140 x 320 x 25 mm (+ Proximity reader: 4.5 mm)	Intercom operating temperature -20°C to +70°C Intercom storage temperature -20°C to +70°C Intercom protection class Intercom IP55 Outdoor fitting

INTRACODE INTERCOMS RANGE - SURFACE-MOUNTED


REFERENCES	INTERCOMS ONLY, WITH 12-KEY BACKLIT CODED KEYPAD AND PROXIMITY READER	OUR PRICES
01-0101-XX	Zamak	
01-0102-XX	Bronze	
COMPLETE PACKS INCLUDING 1 INTERCOM + 1 100-NAME CENTRAL UNIT (1-door central unit 03-0102-XX)		
01-0104-XX	Zamak	
01-0106-XX	Bronze	
COMPLETE PACKS INCLUDING 1 INTERCOM + 1 1,000-NAME CENTRAL UNIT (2-door central unit 03-0101-XX)		
01-0103-XX	Zamak	
01-0105-XX	Bronze	

Monthly

Classic monthly packages
AUDIO or BOXEO
 Unlimited calls and updates

Custom

Adjustable packages
PREPAID or FLEET
 Unlimited calls and updates

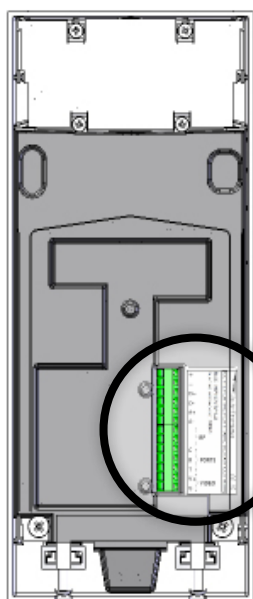

BASIC DIAGRAM

