




# PROXIMITY READER

- ✔ Ideal replacement for lock barrel
- ✔ Compatible with INTRATONE central units

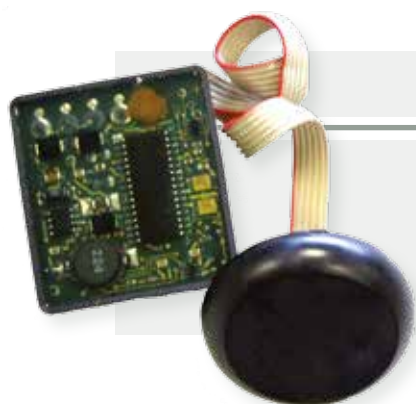


04-0104-XX Proximity reader only, for connection to a central unit (other than the Light Central Unit)



REMOTE ONLINE MANAGEMENT  
[www.intratone.com](http://www.intratone.com)



## SIMPLIFIED DIAGRAM

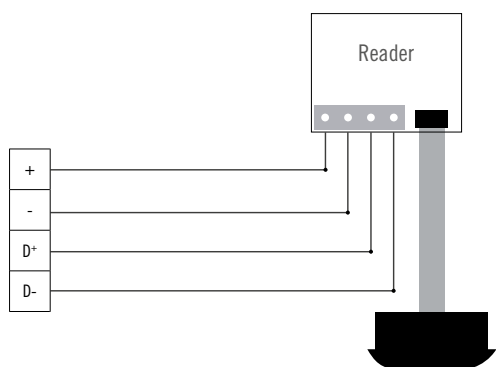

WITH CENTRAL UNIT      1 DOOR (03-0102-XX)      2 DOORS (03-0101-XX)

### FUNCTIONS

Compatible with competing MIFARE badges and remote controls	•	•
Open access slot	•	•
Log events	•	•
Alerts	•	•

### CAPACITIES

Max. number of mobile key badges/masterkeys	1,000	7,000
---	-------	-------

## TECHNICAL SPECIFICATIONS

### POWER SUPPLY

Reader, via the central unit **12 to 24 V DC**

### CABLING

Central unit - Reader

**4 wires - Ø 0.5 mm - 100 m**

**4 wires - Ø 0.8 mm - 200 m**

### SIZE (L X H X D)

Reader (bare) **38 x 42 x 17.5 mm**

Read head (with cover) **41 x 72 x 17.5 mm**

Read head (only) **Ø 40 x 7 mm**

### ENVIRONMENT

Operating temperature **-20°C to + 70°C**

Storage temperature **-20°C to + 70°C**

Protection class

Reader **IP50**

Read head **IP68**

## PROXIMITY READERS RANGE

REFERENCES	PROXIMITY READER - T25	PRICES
04-0104-XX	Reader only, for connection to a central unit	
<b>INTRABOX</b> COMPLETE PACKS FOR MANAGING 1 ACCESS POINT IN REAL-TIME AND REMOTELY, WITHOUT SUBSCRIPTION <small>Includes 1 GPRS unit and 10 years of unlimited DATA updates</small>		
06-0102-XX	Proximity reader (04-0104-XX) with a 1-door central unit (03-0102-XX)	
ACCESSORIES - BOXES FOR SURFACE MOUNTING - STAINLESS-STEEL FINISH		
12-0107	For proximity reader (front panel included)	
ACCESSORIES - RECESSED BOXES		
12-0101	For proximity reader, stainless steel finish	
12-0121	For proximity reader, brass finish	